

Airport Platov, Rostov-on-Don, Russia. Pilkington Suncool® 70/35 Pro T



PILKINGTON

ARCHITECTURAL GLASS

Catalogue 2020



Pilkington Glass, being an acknowledged leader in the glass industry, is constantly perfecting its products. One of the most recent achievements of our company is **Pilkington Suncool®** glass series created by fine-tuning of the Double Silver® state-of-the-art technology.

Double Silver® is a sophisticated coating with two separate silver layers applied to the glass substrate. This technology allows to achieve extremely high values as to light transmittance, excellent energy saving and solar control properties along with maximizing selectivity.

Pilkington Suncool® series offers a wide range of products with various colours and performance values.



PILKINGTON



Pilkington Suncool® coatings are featuring:

- Wide range of appealing colour tints
- Maximum neutrality from inside
- Unique performance with light transmittance ranging from 30% to 71% and solar factor from 18% to 43%
- High selectivity
- Excellent energy saving properties

For more detailed information about characteristics and applications of Pilkington Suncool® products please see the Glass Processing Manual or address Pilkington technical service.



Metropolitan Business Center
Pilkington Optitherm® S3

Warsaw, Poland



Content

Pilkington Suncool® 70/40 Pro T	page 6-7
Pilkington Suncool® 70/35 Pro T	page 8-9
Pilkington Suncool® 66/33 Pro T	page 10-11
Pilkington Suncool® 50/25 Pro T	page 12-13
Pilkington Suncool®-R Blue 50/25 Pro T	page 14-15
Pilkington Suncool®-R Silver 50/27 Pro T	page 16-17
Pilkington Suncool®-R Bronze 45/25 Pro T	page 18
Pilkington Suncool®-R Green 45/25 Pro T	page 19
Pilkington Suncool® 40/22 Pro T	page 20-21
Pilkington Suncool® 30/16 Pro T	page 22-23
Pilkington Optitherm® S3 Pro T	page 24-25
Technical Data Table	page 26

Residential Complex LINER

Pilkington Suncool® 70/40 Pro T

Moscow, Russia



Pilkington Suncool® 70/40 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air -filled W/m²K	Argon -filled W/m²K
EN	73	10	40	43	0.49	1.4	1.1

All values are calculated for the central* area of the IG unit 6l - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.



Pilkington Suncool® 70/40 Pro T combines maximum transparency with neutral colour and excellent solar control properties. Recommended for buildings requiring maximum natural light, e.g. residential houses.

Airport Platov

Pilkington Suncool® 70/35 Pro T

Rostov-on-Don, Russia



Pilkington Suncool® 70/35 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air -filled W/m²K	Argon -filled W/m²K
EN	70	16	35	37	0.43	1.3	1.0

All values are calculated for the central* area of the IG unit 6| - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.



Pilkington Suncool® 70/35 Pro T represents the up-to-date supplement to the Suncool® products range with neutral tint and light reflectance close to the ordinary float glass. It features an outstanding selectivity due to a very low solar factor and high transparency.

Fort Tower Business Centre

Pilkington Suncool® 66/33 Pro T


Saint Petersburg, Russia



Pilkington Suncool® 66/33 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air -filled W/m²K	Argon -filled W/m²K
EN	67	16	34	36	0.41	1.3	1.0

All values are calculated for the central* area of the IG unit 6| - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.

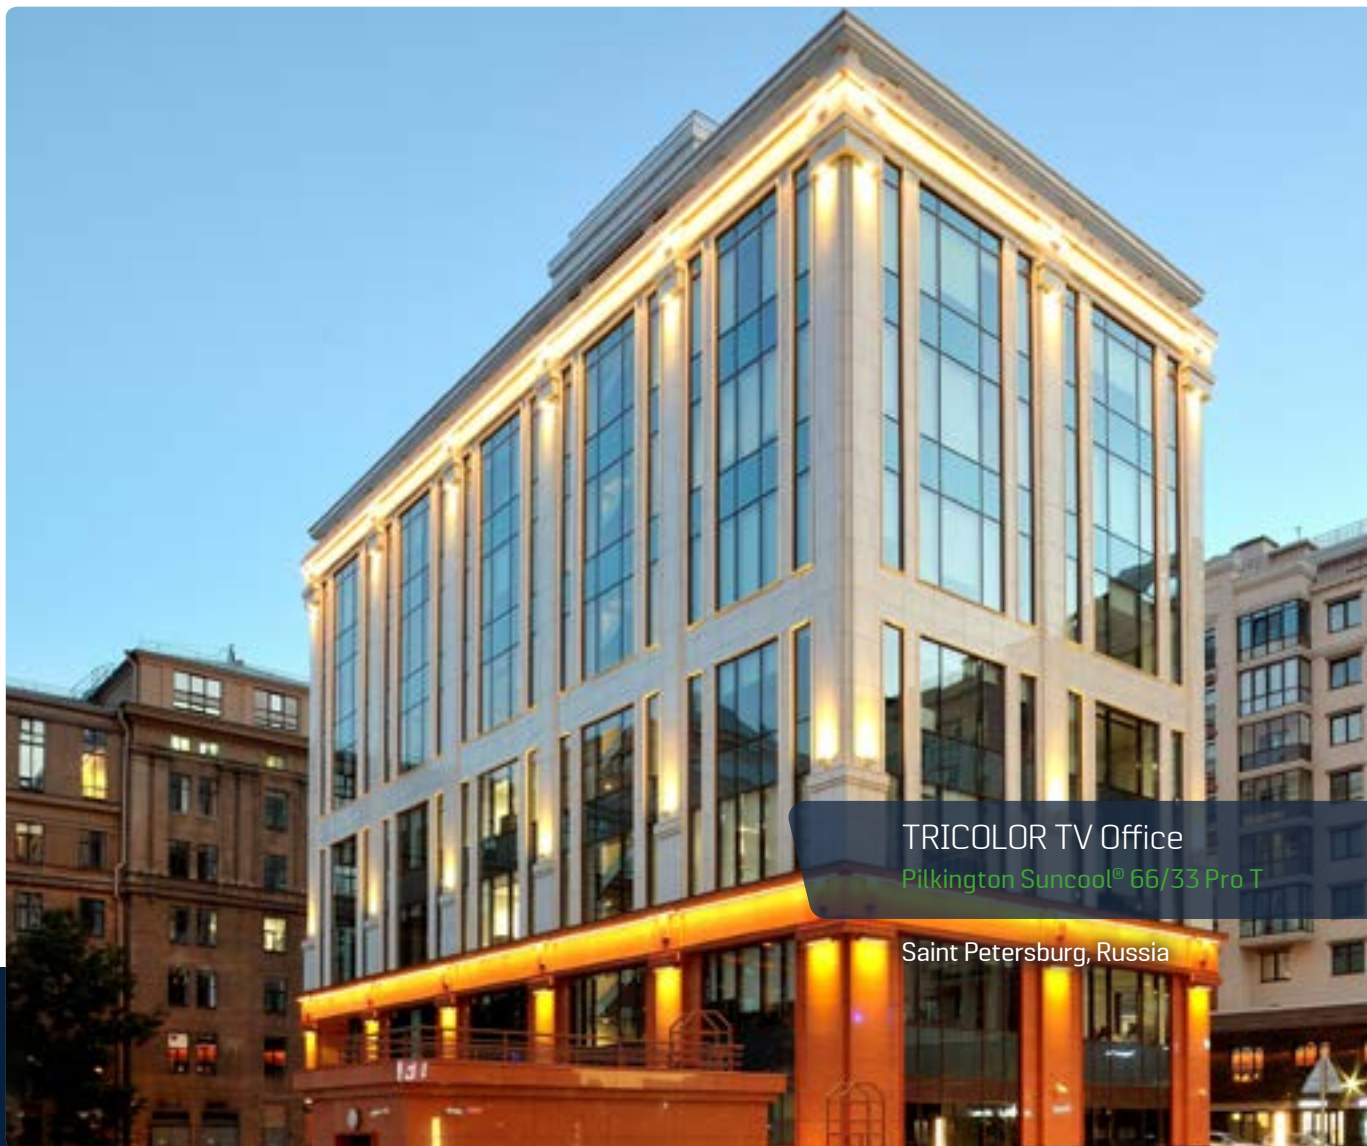

TRICOLOR TV Office
Pilkington Suncool® 66/33 Pro T

Saint Petersburg, Russia

Pilkington Suncool® 66/33 Pro T is a versatile architectural glass with high selectivity, which fits perfectly both commercial and residential buildings. Low outside reflectance, excellent solar factor and high light transmittance.

Windesheim University
Pilkington Suncool® 50/25 Pro T

Zwolle, Netherlands



Pilkington Suncool® 50/25 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air -filled W/m²K	Argon -filled W/m²K
EN	51	18	25	27	0.31	1.3	1.0

All values are calculated for the central* area of the IG unit 6| - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.



Pilkington Suncool® 50/25 Pro T is a product with neutral colour tint and minimal solar heat gain. Excellent choice for floor-to-ceiling glazing when reduced power consumption of air-conditioning systems is a must. Due to high light transmittance, the inner spaces of the building gain lots of natural light.

Federation Tower, Moscow International Business Center

Pilkington Suncool®-R Blue 50/25 Pro T

Moscow, Russia



Pilkington Suncool®-R Blue 50/25 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air -filled W/m²K	Argon -filled W/m²K
EN	47	27	26	28	0.32	1.3	1.0

All values are calculated for the central* area of the IG unit 6| - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.



Pilkington Suncool®-R Blue 50/25 Pro T features a shiny blue appearance. Due to the unique magnetron coating technology it lets in neutral light inside the building without any colour distortion. High light transmittance and selectivity of this product allow to get a comfortable inner environment with a coloured exterior.

Residential Complex Turgenev

Pilkington Suncool®-R Silver 50/27 Pro T


Krasnodar, Russia



Pilkington Suncool®-R Silver 50/27 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air-filled W/m²K	Argon-filled W/m²K
EN	47	31	27	29	0.33	1.3	1.0

All values are calculated for the central* area of the IG unit 6| - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.

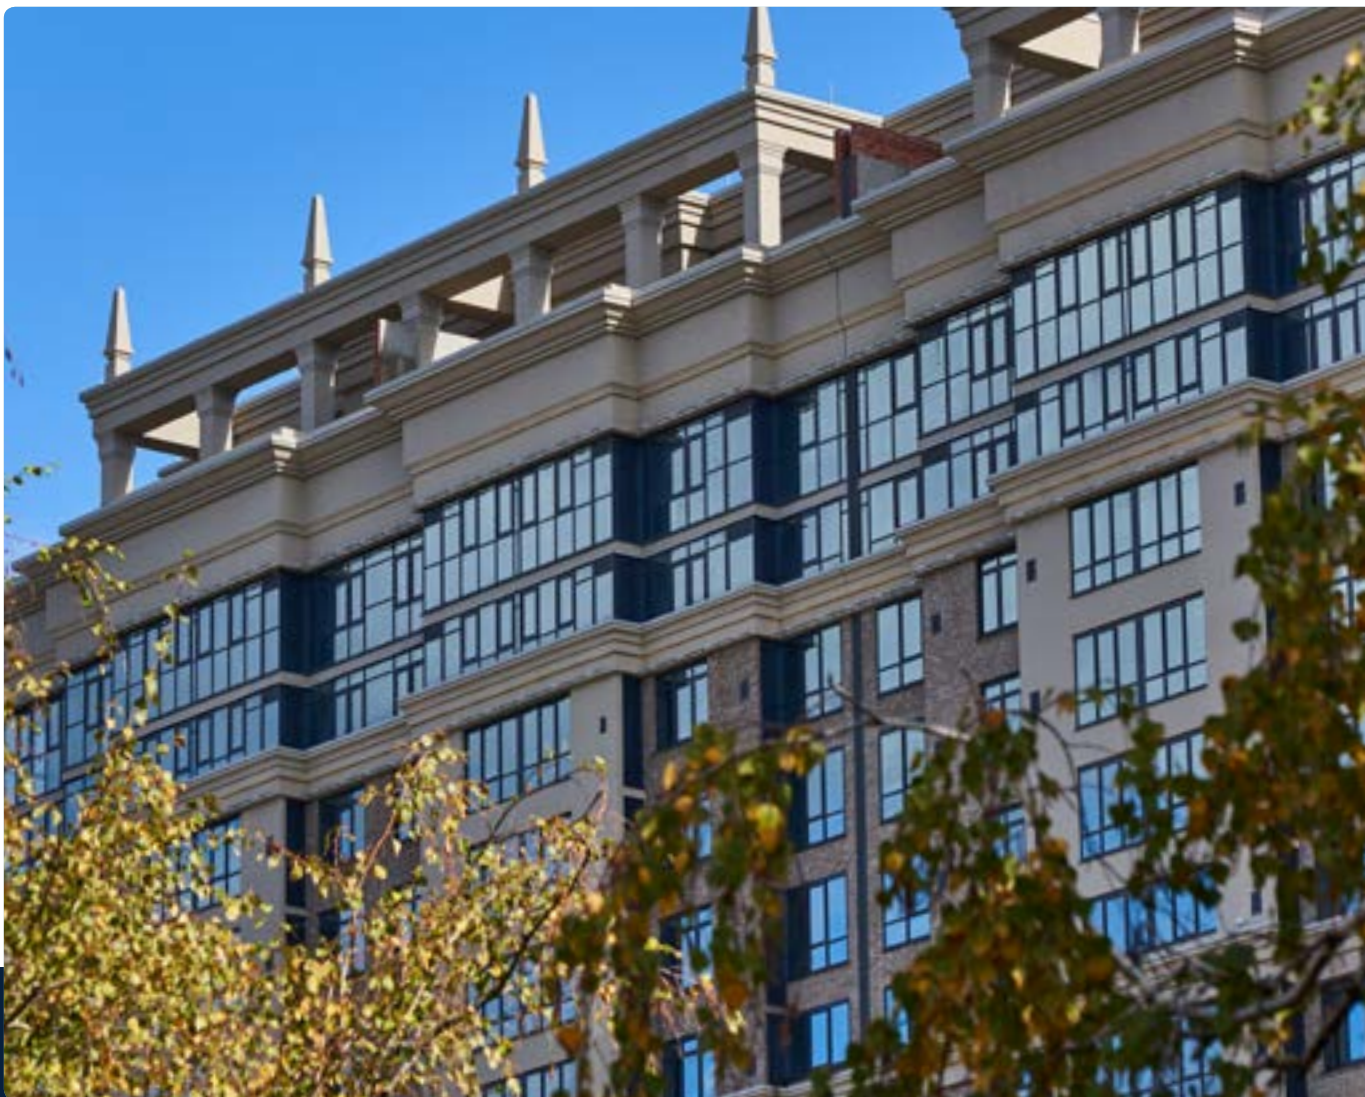

Pilkington Suncool®-R Silver 50/27 Pro T has a shiny silvery appearance with highly reflective exterior. Due to the unique magnetron coating technology it lets in neutral light inside the building without any tint. This product fits ideally projects where high illumination inside the building goes along with high reflection outside.

Pilkington Suncool®-R Bronze 45/25 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air -filled W/m²K	Argon -filled W/m²K
EN	43	24	23	26	0.30	1.3	1.0

All values are calculated for the central* area of the IG unit 6| - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.



Pilkington Suncool®-R Bronze 45/25 Pro T features an appealing bronze colour from the outside. Due to the unique magnetron coating technology it lets in neutral light inside the building without any tint. Excellent solar control properties make this product an ideal solution for southern regions.

Pilkington Suncool®-R Green 45/25 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air -filled W/m²K	Argon -filled W/m²K
EN	44	34	26	28	0.32	1.3	1.0

All values are calculated for the central* area of the IG unit 6j - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.



Pilkington Suncool®-R Green 45/25 Pro T has a highly reflective exterior with shiny green tint. Due to the unique magnetron coating technology it lets in neutral light inside the building without colour distortions. It fits best facades which should both provide a lot of illumination inside the building and have a high external reflection.

MI Arena

Pilkington Suncool® 40/22 Pro T

Saint Petersburg, Russia



Pilkington Suncool® 40/22 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air-filled W/m²K	Argon-filled W/m²K
EN	40	20	20	23	0.26	1.3	1.1

All values are calculated for the central* area of the IG unit 6j - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.



Pilkington Suncool® 40/22 Pro T is an ideal solution in circumstances when maximum solar control has to be combined with transparency. Due to a very low solar factor this product fits well for the skylight glazing (e.g. atriums) reducing the total solar heat gain despite the intensive sunlight.

Business Centre Academy

Pilkington Suncool® 30/16 Pro T

Minsk, Belarus



Pilkington Suncool® 30/16 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air-filled W/m²K	Argon-filled W/m²K
EN	30	26	16	19	0.22	1.3	1.0

All values are calculated for the central* area of the IG unit 6| - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.



Pilkington Suncool® 30/16 Pro T offers the best protection from the solar radiation, regarding both light and heat. It finds its best use in large-area façades and horizontal roof glazing. Due to an extremely low solar factor (19%) this product is especially effective when keeping solar heat gain under control is paramount.



Business Centre Metropolitan
Pilkington Optitherm® S3

Warsaw, Poland

Pilkington Optitherm[®] S3 Pro T

Standart	Light		Solar Radiant Heat			U _g -value	
	Transmittance LT, %	Reflectance out LRout, %	Direct energy transmittance DET, %	Solar Factor SF, %	Shading coefficient SC	Air -filled W/m ² K	Argon -filled W/m ² K
EN	81	11	55	58	0.67	1.4	1.1

All values are calculated for the central* area of the IG unit 6j - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.



Pilkington Optitherm[®] S3 Pro T low-emissivity coating offers maximum transparency and neutrality. Excellent energy-saving solution for the residential buildings.

TECHNICAL DATA / EN

Product	Light transmittance	Light reflectance	Direct energy transmittance	Energy reflectance	Energy absorptance	Solar factor	Shading coefficient	U _g -value (air-filled)	U _g -value (argon-filled)
	LT%	L _{Rout} %	DET%	ER%	EA%	SF%	SC	U _g (air) W/m ² K	U _g (argon) W/m ² K
Pilkington Suncool® 70/40 <small>PRO T</small>	73	10	40	31	29	43	0.49	1.4	1.1
Pilkington Suncool® 70/35 <small>PRO T</small>	70	16	35	35	30	37	0.43	1.3	1.0
Pilkington Suncool® 66/33 <small>PRO T</small>	67	16	34	34	32	36	0.41	1.3	1.0
Pilkington Suncool® 50/25 <small>PRO T</small>	51	18	25	32	43	27	0.31	1.3	1.0
Pilkington Suncool®-R Blue 50/25 <small>PRO T</small>	47	27	26	36	38	28	0.32	1.3	1.0
Pilkington Suncool®-R Silver 50/27 <small>PRO T</small>	47	31	27	36	37	29	0.33	1.3	1.0
Pilkington Suncool®-R Bronze 45/25 <small>PRO T</small>	43	24	23	38	38	26	0.30	1.3	1.0
Pilkington Suncool®-R Green 45/25 <small>PRO T</small>	44	34	26	40	34	28	0.32	1.3	1.0
Pilkington Suncool® 40/22 <small>PRO T</small>	40	20	20	34	46	23	0.26	1.3	1.1
Pilkington Suncool® 30/16 <small>PRO T</small>	30	26	16	37	47	19	0.22	1.3	1.0
Pilkington Optitherm® S3 <small>PRO T</small>	81	11	55	23	22	58	0.67	1.4	1.1

All values are calculated for the central* area of the IG unit 6 | - 16 Ar - 4 according to EN 410 and EN 673 climatic conditions.

PRO T Pro T range comprises products which are available in toughenable form. The glass must be toughened before use and in its final form provides the same performance values as the annealed versions.



ThyssenKrupp Headquater
Pilkington Suncool® 70/40

Essen, Germany

For more detailed information about characteristics and applications of Pilkington Suncool® products please see the Glass Processing Manual or address Pilkington technical service.

This publication provides only a general description of the products. It is the responsibility of the user to ensure that the use of these products is appropriate for any particular application and that such use complies with all relevant legislation, standards, code of practice and other requirements. To the fullest extent permitted by applicable laws, LLC «Pilkington Glass» disclaim all liability for any error in or omission from this publication and for all consequences of relying on it. Performances are subject to change without notice.

*All values are calculated according to database as of March, 2020.

LLC «Pilkington Glass»

1 Stekolnaya Str, Zhukovo Village,
Ramensky District, Moscow Region,
Russia, 140125

tel.: +7 (495) 369-95-00

fax: +7 (495) 369-95-01

www.firstinglass.ru

For further enquiries, please contact
info@firstinglass.ru